

Plastering machines

with electric motor or diesel engine, available in different versions and performance levels



Mixing pumps MP 22 + MP 25 MIXIT

Putzmeister's mixing pumps are among the most compact, most flexible and most efficient plastering machines. The system is derived from the well-known „Gipsomat“.

These pumps can process all pumpable premixed dry mortar up to a granulation of 4 mm and can deliver up to 40 litres per minute. Without much trouble, these mixing pumps can quickly be dismantled into their component groups and are therefore very easy to transport.

	MP 22	MP 25 MIXIT
Pump type	D6 Power	D6 Power
Delivery rate	25 l/ min	25 l/ min
Delivery pressure	40 bar	40 bar
Delivery distance	up to 40 m	up to 40 m
Delivery height	up to 15 m	up to 15 m
Weight	160 kg	240 kg

Double piston pump P 13

This plastering machine has a mechanical pump drive and is suitable for the toughest operations. The robust double piston pump processes plaster consisting of sand, lime, cement and other heavy mortar.

The P 13 allows smooth and surge-free delivery up to the 30th storey. Nonetheless, it is wear-resistant and is absolutely reliable.

	P 13 DMR	P 13 EMR
Pump type	mechan. piston pump KA 139	
Delivery rate	15 to 65 l/ min	30 to 75 l/ min
Delivery press.	40 bar	
Delivery distance	up to 300 m	
Delivery height	up to 100 m	
Drive	2-cyl.-diesel 12.5 kW	electric motor 400 V, 7.5 kW
Weight	1,060 kg	1,000 kg



Worm pumps S 5 + SP 11

The S 5-series is suitable for premixed dry mortar and wet mortar from a bag or silo. This modular system is based on a powerful worm pump, which can be extended with a continuous mixer or a plate mixer.

SP 11 worm pumps are fully hydraulically driven and have the convenience of compulsory mixers. They can process all premixed dry mortar and wet site mixes up to 6 mm.



	S 5 EV*	SP 11 Beliso-series**
Pump type	2L6	2L6
Delivery rate	7-40 l/ min	5-40 l/ min
Delivery pressure	25 bar	25 bar
Delivery distance	up to 60 m	up to 120 m
Delivery height	up to 40 m	up to 60 m
Weight	190 kg	750 kg

*These types are also available with plate mixers or continuous mixers.

**These types are available with flap, swivel, or lift mixers.

Floor screed pumps

for self-levelling floor screed and conventional floor screed

	SP 11 DHF	SP 20 DHF	SP 32 DHF	Self-levelling floor screed worm pumps SP 11, SP 20 + SP 32
Pump type	2L75	7515 or 2L8	7515 or 2L8	Self-levelling floor screed worm pumps are fully hydraulically driven with variable pump outputs. They are ideal for all kinds of self-levelling floor screeds with a granulation of up to 8 mm (SP 20 even up to 12 mm).
Delivery rate	220 l/ min	250 l/ min	245 l/ min	
Delivery press.	25 bar	35 bar	35 bar	
Delivery distance	up to 100 m	up to 180 m	up to 180 m	
Delivery height	up to 60 m	up to 90 m	up to 180 m	
Diesel drive	22.7 kW	32.8 kW	30.5 kW	
Weight	< 750 kg	960 kg	1.450 kg	




Mixokret floor screed conveyor

Mixokret pneumatic air conveyors make it possible to deliver dry to earth-moist mixes of sand, gravel, floor screed through to light-weight concrete – all up to a distance of 200 m. The extensive range, with diesel or electric drive, some with compressors of 2.7 to 5.3 m³/h, with hydraulic loader or scraper, means everyone can find the right machine for them.



	M 730 DH*	M 740 D*	M 760 DH*	M 501 E	M 701 E	M 710 EBS	
Diesel drive	23 kW	31.5 kW	46.5 kW	Electric drive	15 kW	7.5 kW	7.5 kW
Delivery rate	2.5 m ³ / h	3.8 m ³ / h	4 m ³ / h	Delivery rate	up to 6 m ³ / h	6 m ³ / h	4 m ³ / h
Delivery press.	7 bar	7 bar	7 bar	Delivery pressure	6 bar	6 bar	7 bar
Max. particle size	16 mm	16 mm	16 mm	Max. particle size	32 mm	16 mm	16 mm
Weight	1,150 kg	1,564 kg	1,600 kg	Weight	1,100 kg	720 kg	1,200 kg

*These types are also available with loaders or with loaders and scrapers.

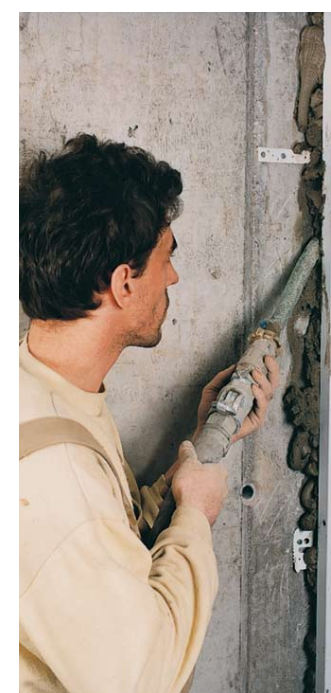

Fine plastering pump P 12 – Sprayboy

The small fine plastering machine that mixes, pumps and sprays – and all from one hopper. Ideal for cementitious adhesive, thin layer plasters, etc. up to a granulation of 3 mm. Just the right machine for stucco plasterers, refurbishing companies and painters.

	P 12
Pump type	D5 short
Delivery rate	6 +12 l/ min
Delivery pressure	25 bar
Delivery distance	up to 30 m
Delivery height	up to 15 m
Weight	125 kg



Fine concrete pump P 715

The powerful, small and light trailer fine concrete pump for pumping grout, self-levelling floor screed and fine concrete up to 16 mm. Ideal for concrete spraying, mortar grouting and for concreting tasks with a granulation of up to 16 mm.

	P 715 TD	P 715 TE
Pump type	2 cyl. piston pump with S-transfer tube	
Delivery rate	4-17.4 m ³ / h	4-18.2 m ³ / h
Delivery pressure	68 bar	68 bar
Drive	34.5 kW Diesel	30 kW Elektro
Weight	1,850 kg	1,800 kg
Dimensions	420 x 151 x 160 cm	
Fill height	118 cm	118 cm



Both types are also available as stationary versions.

Fine plaster spraying machines and paint rollers for painters and stucco plasterers

Strobot	204 S	401 S	406 S
Delivery rate	0-5 l/ min	0-11 l/ min	0-15 l/ min
Delivery press.	up to 25 bar	up to 30 bar	up to 30 bar
Delivery height	up to 12 m	up to 30 m	up to 30 m
Electric drive	0.55 kW	1.5 kW	2.2 kW
Weight	35 kg	approx. 50 kg	approx. 65 kg

Strobot delivery pumps 204 S, 401 S + 406 S

The Strobot series delivery pumps are very light, manageable and easy to use. The engine timing is controlled either by speed of rotation or by pressure and ensures a constant delivery rate (infinitely variable) and thus an even spray pattern. Every delivery pump is distinguished by ease of use and versatility.



Stromixer continuous mixer D 1000

If you want to process mineral dry material, the Stromixer D 1000 is the ideal add-on to our delivery pumps.

It proves its worth through excellent mixing results and a well thought out construction concept. All parts are made from rust-free material (e.g. stainless steel) and are easy to clean.

Stromixer D 1000

Electric drive	1.5 kW, 220 V/ 50 Hz
Mixing performance	up to 15 l/ min
Dimensions	98 x 70 x 95 cm
Weight	97 kg

Strobber tool washing systems

Strobbers are washing systems connected to the cold and hot water supply. They are available in two sizes and can thoroughly clean not only your rollers, but also your delivery pump

The dirty water flows into the filter system from the removable basin. In the filter system, it is cleaned by rough materials. It is then automatically pumped from the container to the drain. This all takes place within the closed modular system and thus provides protection against unpleasant smells.

Strobber WA 800 WA 1500

Dimensions	80 x 80 x 134 cm	80 x 150 x 134 cm
Roller cleaner	10 l/ min, 25 bar, 8 nozzles	
Filters	Stainless steel basket with fabric filter	

At home on the world's construction sites - one of the world's biggest ranges of machines



Putzmeister Mörtelmaschinen GmbH presents you with one of the world's biggest ranges of machines: plastering machines, floor screed pumps, fine concrete pumps, fine plaster spraying devices and professional high-pressure cleaners. Together with an efficient, world-wide service network, these machines present you with the optimal conditions and possibilities to alleviate your every day work and make it more profitable.

Putzmeister

MM 3451-9 GB

Dynajet® High pressure cleaner for pressure ranges up to 3.000 bar/ 43,500 PSI

Dynajet® High pressure cleaner – Trolleys

The compact and mobile trolleys are professional devices which can clean with a high pressure of up to 500 bar/ 7,250 PSI. They are suitable for almost all cleaning operations, such as facade cleaning, machine cleaning, etc. They are driven either by powerful electric, petrol or diesel engines.

Variants	Electric	Petrol	Diesel
Drive	15 kW	14.5 kW	14.5 kW
Working press.	150, 350 or 500 bar/ 2,175, 5,075 or 7,250 PSI		
Delivery rate	42 l/ min, 21 l/ min or 15 l/ min		
Water temp.	Cold water	Cold water	Cold water
Weight	147 kg	105 kg	215 kg



Dynajet® High pressure cleaner – Trailer

These powerful trailer units clean with hot water up to a temperature of 95° C and with a working pressure of up to 800 bar. They are diesel driven and have integrated water tanks for shortterm, independent work.



Other pressure and performance values available on request.

Dynajet®	350 th	500 th	800 th
Diesel drive	13 kW	34 kW	34 kW
Working press.	350 bar	500 bar	800 bar
Delivery rate	7-16 l/ min	15-30 l/ min	10-21 l/ min
Water temp.	95° C	95° C	95° C
Weight	760 kg	1,600 kg	1,640 kg

Putzmeister Mörtelmaschinen GmbH

The company is a 100% subsidiary of Putzmeister AG, registered headquarters in Aichtal near Stuttgart, Germany. Since 1958, Putzmeister has been a manufacturer and world-wide provider of mortar machines, fine plaster spray and paint pumps, concrete pumps, tunnel machines, industrial pumps, large robotics for cleaning complex systems and facilities and of professional high-pressure cleaning systems. This strong network offers users and sales partners ideal conditions in terms of competence, investment security and optimum service in all areas.

MM 3451-9 GB

Your Putzmeister partner



Putzmeister

Putzmeister Mörtelmaschinen GmbH · Max-Eyth-Str. 10 · 72631 Aichtal · Germany · Tel +49 (0) 71 27 599-0 · Fax 599-743
eMail rmm@pmw.de · www.putzmeister.de/pm